


Fiducial Mark Requirements

Global Fiducial

- Two marks located diagonally across the board preferably on top left and bottom right corner
- The marks are formed of tin lead plating in the center circular pad
- Do not apply solder resist within outer circle as shown below
- Do not mount components or place traces within 1.5mm from the center of the mark

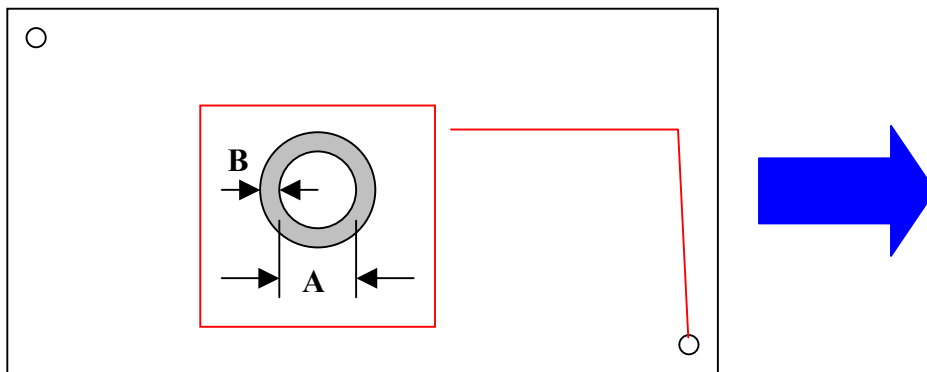

Dimensions:

A= 1.02mm (0.040") +/- 5%

B= 0.51mm (0.020") +/- 15%

Local Fiducial (QFP package component mark)

- Two marks diagonally
- Two component marks for each QFP

